

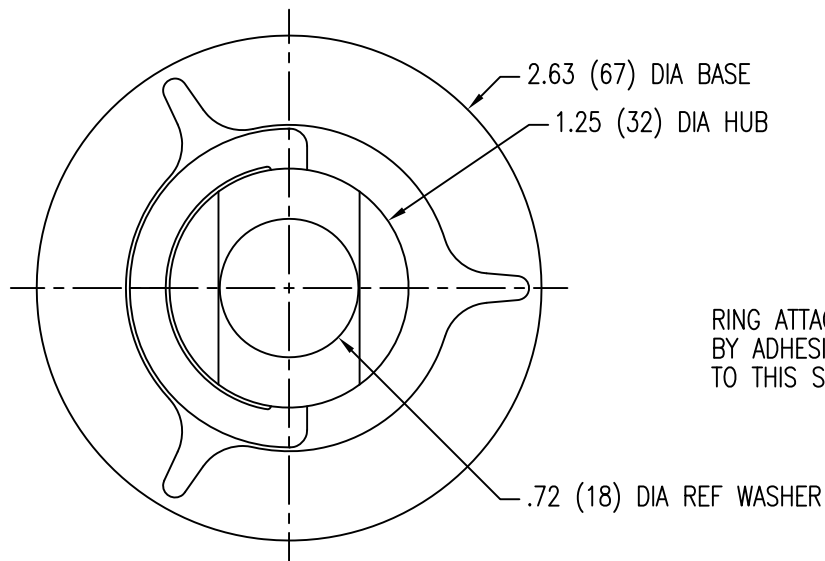


RING ATTACHED
BY ADHESIVE APPLIED
TO THIS SURFACE.

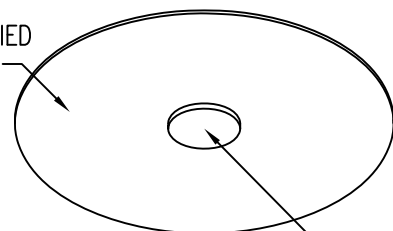

INTERNAL PRESSURE SENSITIVE
ADHESIVE FIXTURE HOLDS RING
WHILE ADHESIVE CURES.

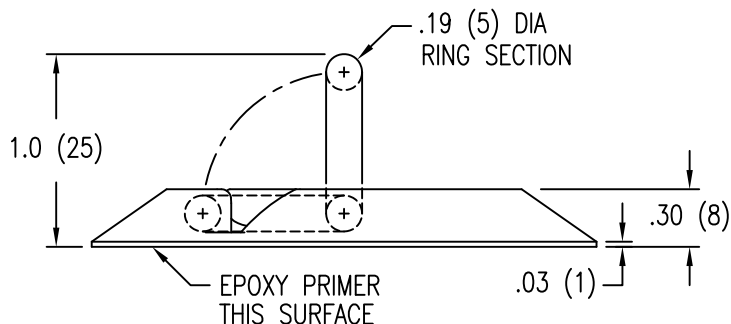

NOTE: DIMENSIONS IN INCHES (mm)

MATERIAL AND FINISH DATA

CODE	BASE AND WASHER MATERIAL	RING AND HUB MATERIAL	FINISH
CRM	316 CRES	316 CRES	PASSIVATE
CRA	316 CRES	A-286 CRES	PASSIVATE

TENSILE STRENGTH REQUIREMENTS

CODE	MINIMUM TENSILE STRENGTH
CRM	400 lbs
CRA	800 lbs

NOTE: THE CM988 FLUSH TIE DOWN RING IS CAPABLE OF THE MINIMUM TENSILE STRENGTH

EXAMPLE PART NUMBER

CM988 CRM P

EPOXY PRIMER ON BASEPLATE
MATERIAL - 316 CRES
BASIC PART NUMBER

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE
IN INCHES AND TOLERANCES ARE AS SHOWN BELOW.
DIMENSIONAL TOLERANCES AND SYMBOLS PER ANSI
Y14.5M-1982.

PROPRIETARY PARTS SHOWN IN THIS DRAWING ARE THE SUBJECT
OF ISSUED UNITED STATES AND FOREIGN PATENTS AND PATENTS
PENDING.
UNAUTHORIZED REPRODUCTION AND/OR DISTRIBUTION OF THIS
DRAWING IS SPECIFICALLY PROHIBITED.

CLICK BOND

CARSON CITY
NEVADA 89706

APPROVALS		DATE
DRAWN	DAC	9DEC14
CHECKED	DAC	9DEC14
RELEASED	DAC	9DEC14
REVISED	DAC	9DEC14

TITLE			
RING, TIE DOWN, FLUSH			
SIZE	CAGE CODE	DWG. NO.	REV.
A	66530	CM988	2
SCALE			SHEET 1 OF 1
1/1	9DEC14		